

J-1170

JAW CRUSHER



STRONG **HERITAGE**, STRONG **FUTURE**

 **FINLAY**®
A TEREX BRAND

J-1170

JAW CRUSHER



The Finlay® J-1170 mobile jaw crusher provides high production capacity with large reduction ratios.

The heartbeat of the machine is a robust hydrostatically driven Terex jaw chamber which provides high capacity with large reduction ratios. The jaw chamber configuration can be set up specifically for either processing construction demolition debris or quarrying applications.



The J-1170 stone crusher features a heavy duty variable speed VGF and integrated prescreen giving excellent production throughput in quarrying, mining, demolition and recycling applications.

Notable options include a variable speed pan feeder along with an independent prescreen system. Its compact size, quick set up times, ease of transport and user friendly operational features make the J-1170 ideal for all sized operators.



FEATURES:

- > The robust high performance hydrostatically driven single toggle jaw chamber provides high capacity with large reduction ratios.
- > Automatic variable speed VGF ensures continuous choke feeding of the crushing chamber for optimal productivity.
- > High powered hydrostatic drive ensures precise chamber control and reverse functionality for clearing blockages and assisting in demolition and recycling applications.
- > Hydraulically assisted closed side setting adjustment minimises downtime and offers quick adjustment.

TRANSPORT DIMENSIONS

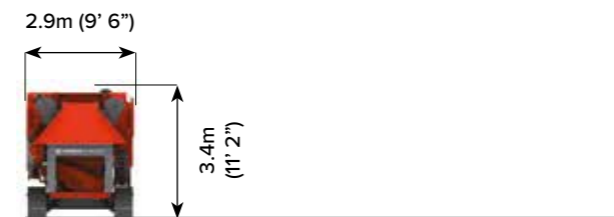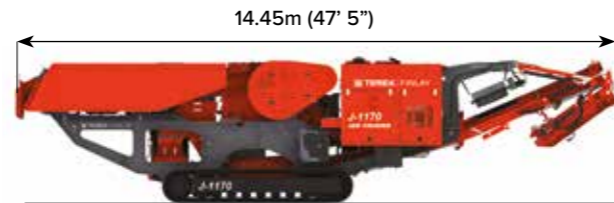

WORKING DIMENSION

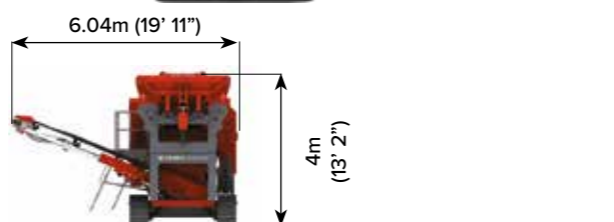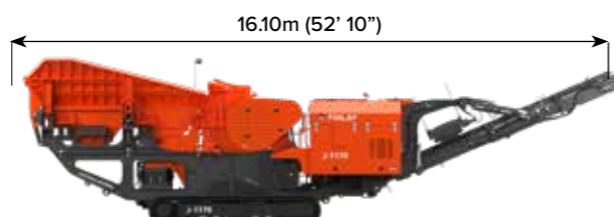

MACHINE WEIGHT: 48,900kg (107,806lbs)
(with HA chamber,VGF, single pole magnet, by-pass conveyor and standard main conveyor)

1 HOPPER/FEEDER

Hopper capacity: 9m³ (11.7yd³)
Feed height: 4.01m (13' 2")
Feed width at rear: 2.4m (7' 10")
Locking mechanism: hydraulic
Vibrating Grizzly feeder (VGF): 1.05m wide 4.25m long

2 BY-PASS CONVEYOR (OPTIONAL)

Belt Width: 650mm (26")
Working Angle: 22°
Hydraulically folds for transport
Discharge Height: 2.9m (9' 6")
Stockpile capacity: 36.3m³ (47.5yds³) @ 40°

3 JAW CRUSHER

Terex 1100mm X 700mm chamber single toggle jaw crusher
Inlet width: 1100mm (44")
Inlet gape: 700mm (28")
Under jaw clearance: 520mm (20.5")
Drive arrangement: Hydrostatic
Maximum Closed Side Settings (CSS): 150mm (6")
Minimum Closed Side Settings (CSS): 50mm (2") - application dependent. 75mm (3") Quarry application
Reverse action for clearing blockages
Hydraulic assist closed side setting standard

4 UNDERCARRIAGE

Shoe Width: 500mm (20")
Two Speed Tracking with 'soft start'
Gradeability: 25°

5 PLATFORMS

Galvanised catwalks and ladders for full maintenance and service access
Catwalks on left hand side of the machine with access to both sides of the powerunit
Compact folding for transport

6 MAGNET (OPTIONAL)

Belt Width: 750mm (30")
Drive: Hydraulic


7 MAIN CONVEYOR

Belt Width: 1m (40")
Working Angle: 23°
Discharge Height: 3.1m (10' 2") with standard conveyor
Impact bars and wear resistant liners at feed point
Standard Stockpile capacity: 44.3m³ (58yds³) @ 40°



T-LINK TELEMATICS

T-Link telematics hardware and software along with free seven year data subscription are fitted and installed as standard.

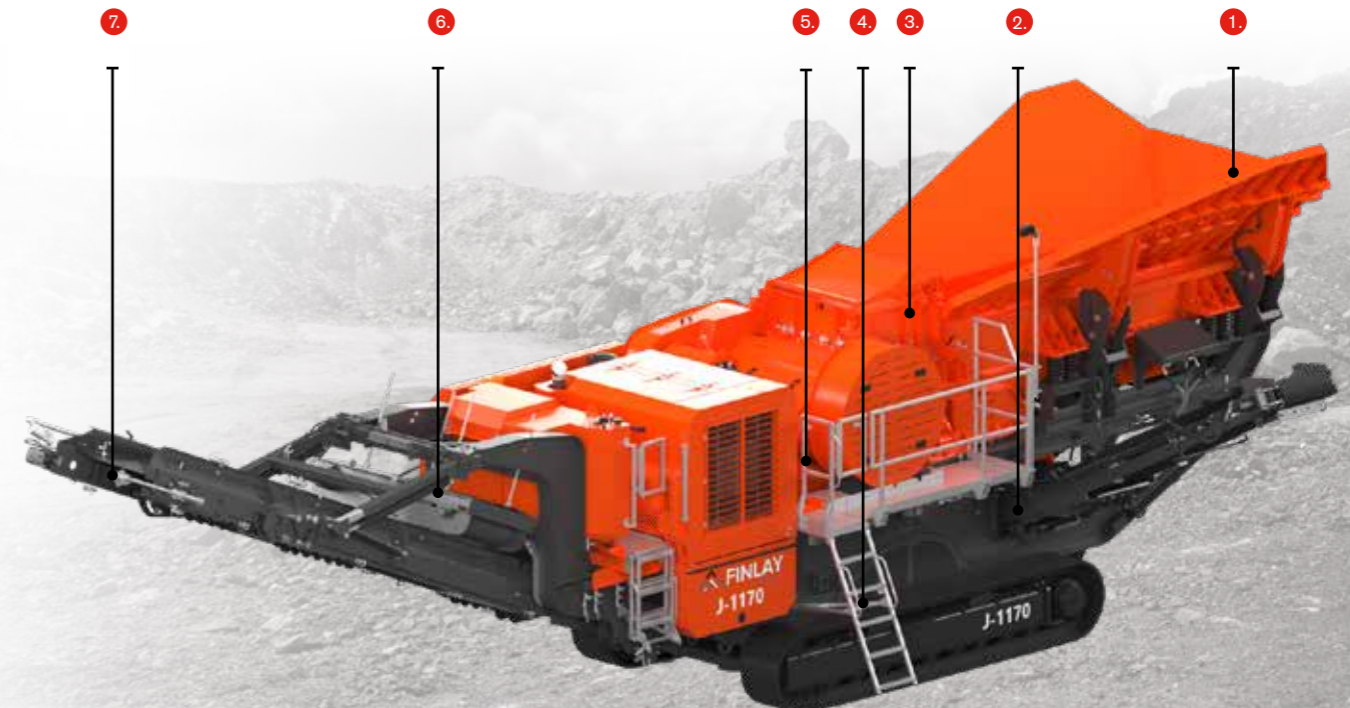



The material in this document is for information only and is subject to change without notice.

Finlay® assumes no liability resulting from errors or omissions in this document, or from the use of the information contained herein.

Due to continual product development we reserve the right to change specifications without notice. Product performance figures given in this brochure are for guidance purposes only, this information does not constitute an expressed or implied warranty or guarantee, but shows test examples. These results will vary depending on application. Photographs are for illustrative purposes only; some or all of the machines in the illustrations may be fitted with optional extras. Please check with your Dealer for details on optional extras.

Published and Printed in 2022

www.terex.com/finlay

E: sales@terexfinlay.com

T: +44 28 82 418 700

